

RECHARGEABLE BATTERIES

ELUBAT NiCd

Batteries for self-contained emergency lighting systems



Technical data nickel cadmium batteries

	SC-cell	D-cell
Temperature range	5 – 50 °C	5 – 50 °C
Voltage/cell	1,2 V	1,2 V
Capacity	1,8 Ah	4,5 Ah
Diameter	23 mm	33 mm
Length/cell	43,25 mm	60 mm


Certification mark

- CE (only if used in emergency lighting)



Measurements

2 SC-cells NiCd stick (Art.-Nr. 31'211'211)

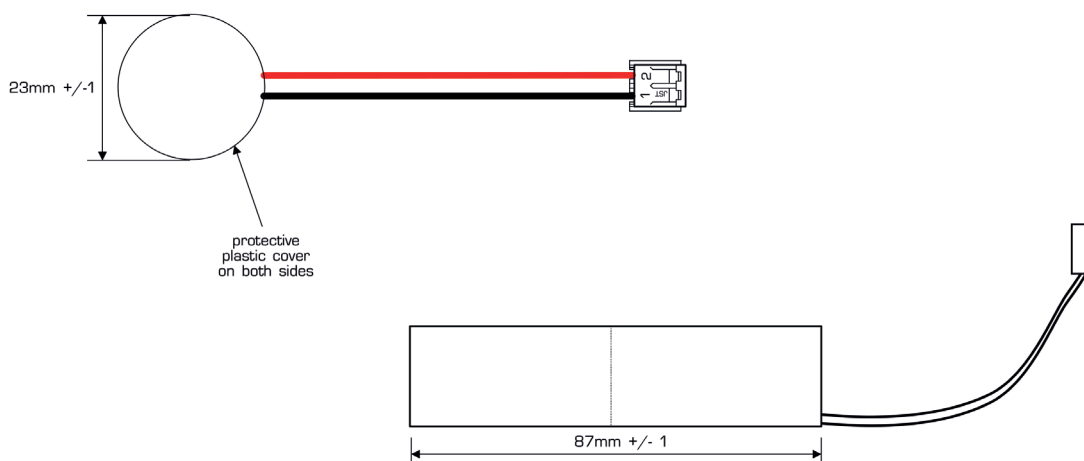

Product properties nickel cadmium batteries

- High-temperature cells 5 – 50 °C
- NiCd batteries
- SC-, D-cells
- Different arrangements of cells and connecting plugs
- Charging time 24 h
- 4 years expected life duration
- 12 months warranty


Fixing caps NiCd SC-cells

- Fixing caps for NiCd batteries 1 h
- Easy mounting
- Suitable for batteries
 - with SC-cells
 - stick-type
- Article number 31'411'000
- Customs tariff number 3926.9000
- Sales unit 500 pieces


Fixing caps NiCd D-cells

- Fixing caps for NiCd batteries 3 h
- Easy mounting
- Suitable for batteries
 - with D-cells
 - stick-type
- Article number 31'421'000
- Customs tariff number 3926.9000
- Sales unit 500 pieces


2 SC-cells NiCd stick (Art.-Nr. 31'211'213) Molex

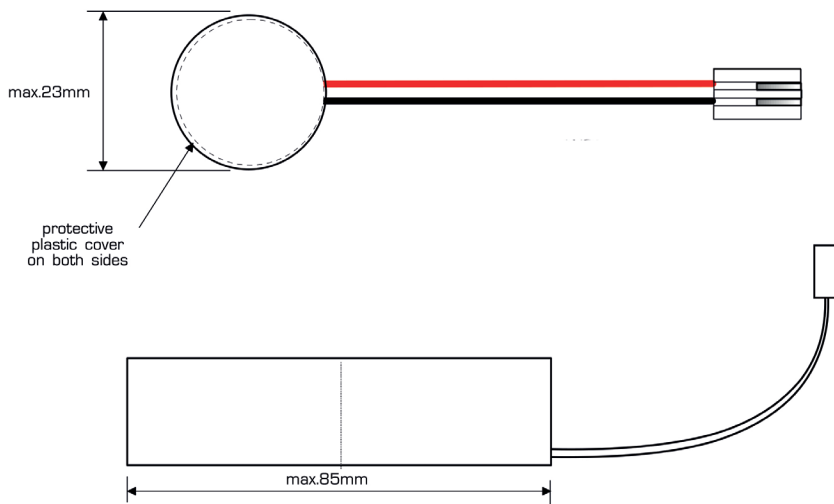


2 SC-cells NiCd block (Art.-Nr. 31'211'231)

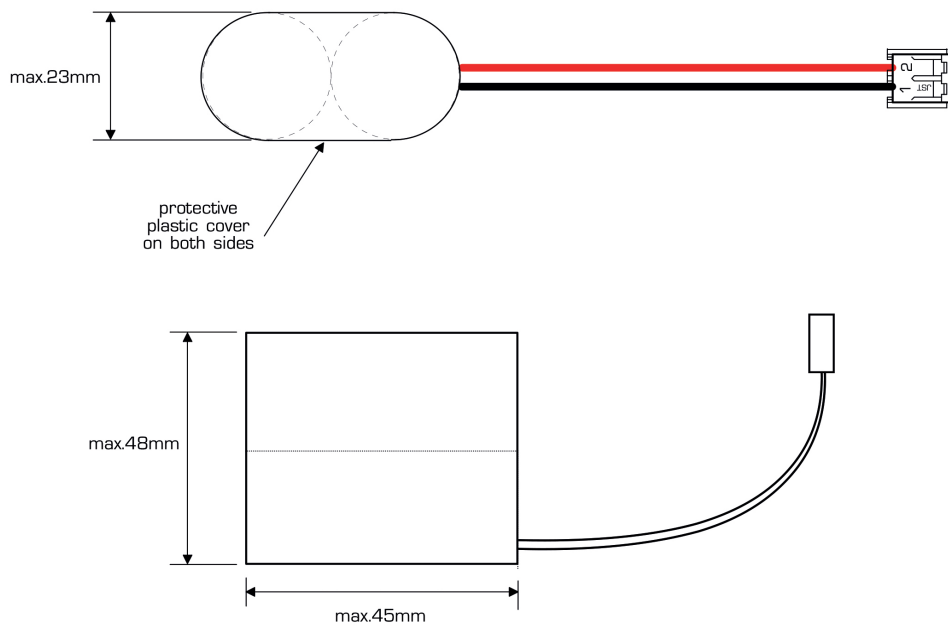


4 SC-cells NiCd stick (Art.-Nr. 31'411'211)

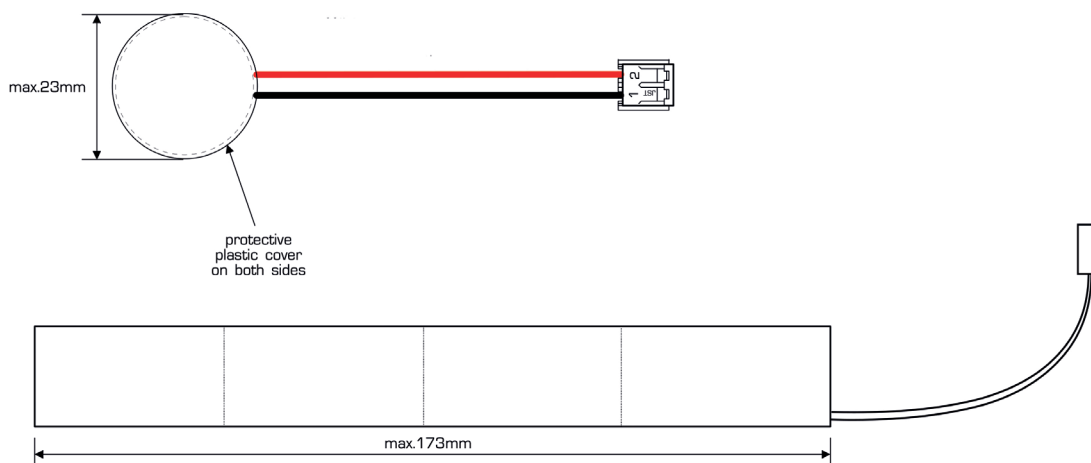


4 SC-cells NiCd twinstick (Art.-Nr. 31'411'221)

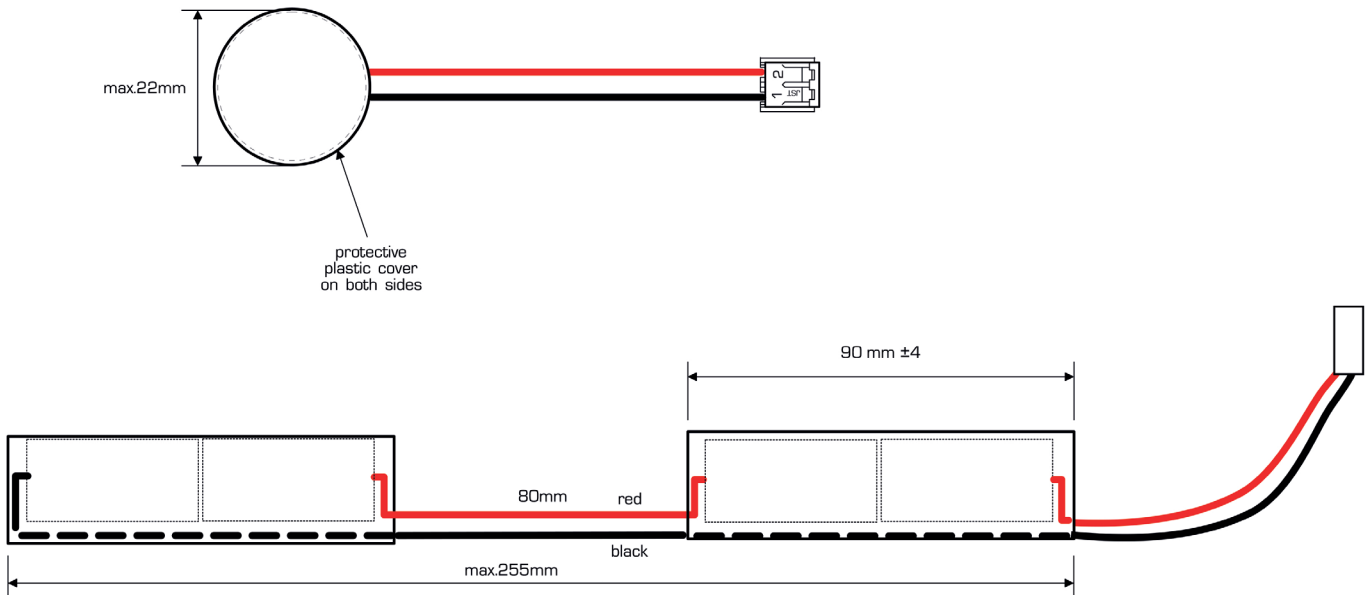


4 SC-cells NiCd block (Art.-Nr. 31'411'231)

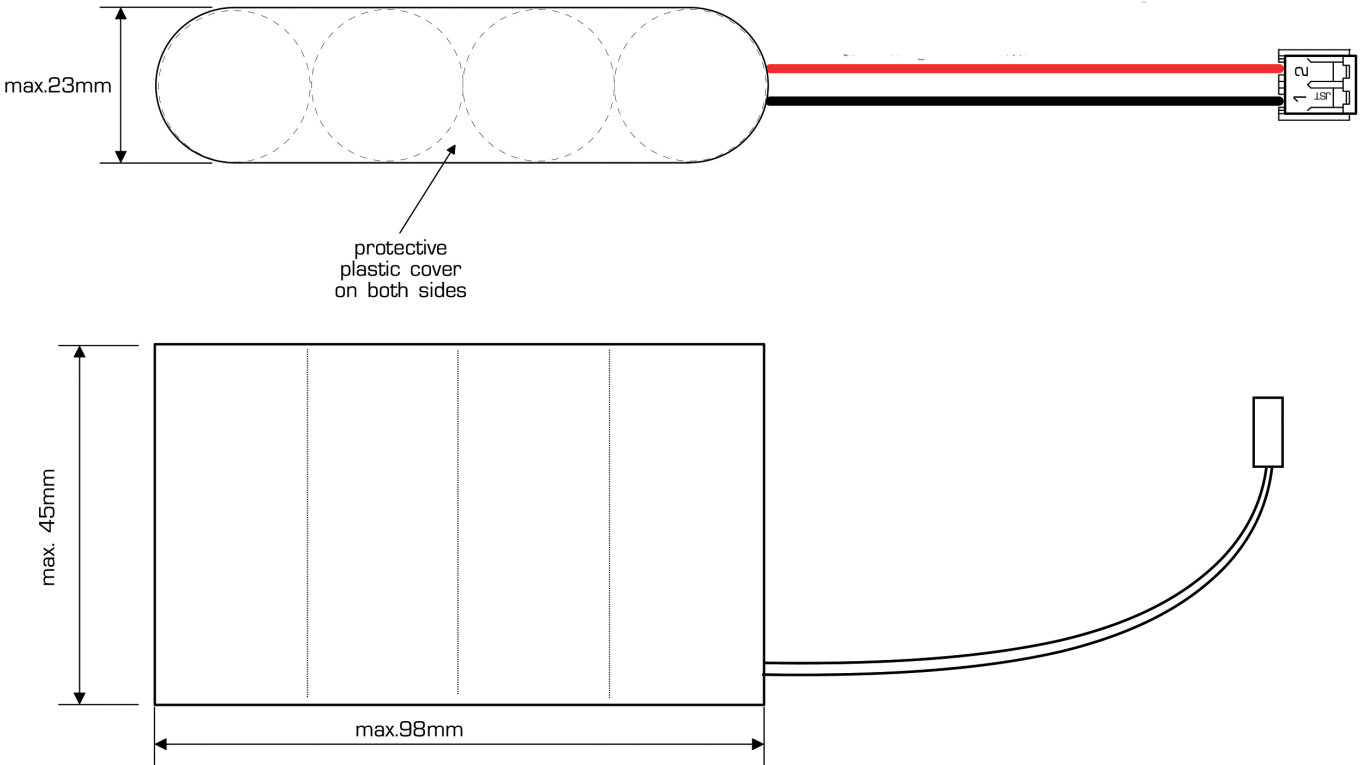

2 D-cells NiCd stick (Art.-Nr. 31'221'411)

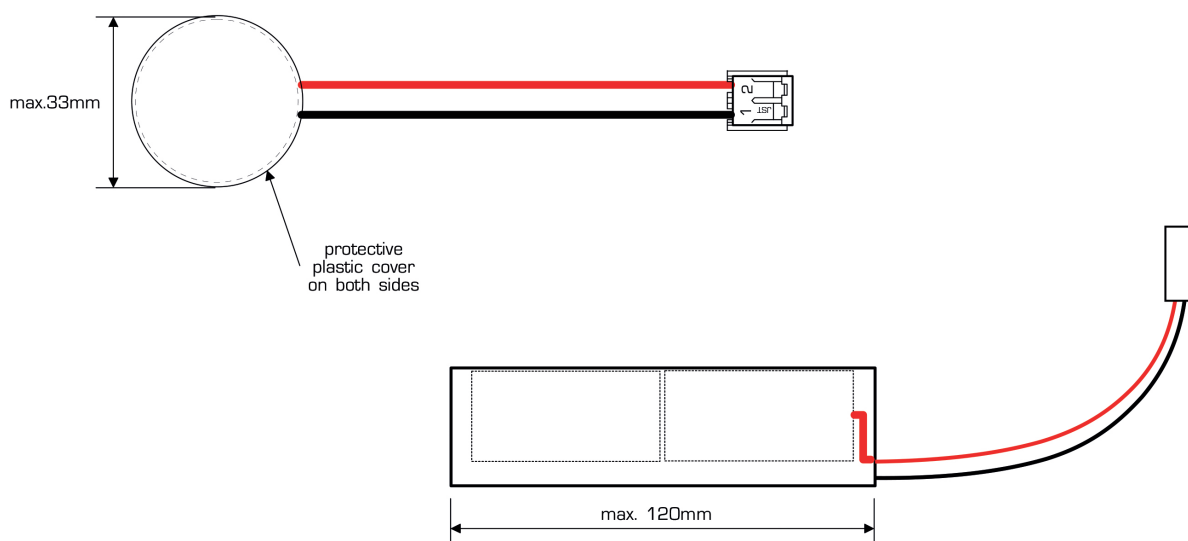

2 D-cells NiCd stick (Art.-Nr. 31'221'413) Molex

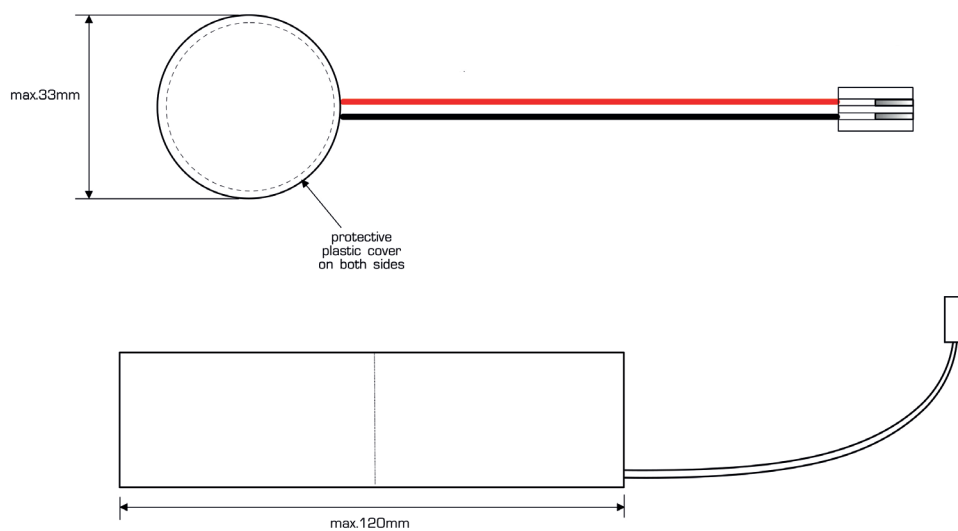

4 D-cells NiCd stick (Art.-Nr. 31'421'411)

